




TALF PL-TPP14-26

LED panels revolutionised lighting in commercial and retail spaces and our market leading products and options are ready to meet your every application. Our range of size and illumination levels and the standard and optional features we offer reflect our focus on flexibility; a flexibility that ensures the best lighting outcome for every client.

Multiple power ratings in the key sizes adds simplicity to product selection ensuring optimum energy efficiency. Our prismatic diffuser delivers low glare and our LED selection ensures excellent colour rendering to further enhance the comfort and efficiency of the lit space.

Applications: Offices, corporate, retail, health services, schools

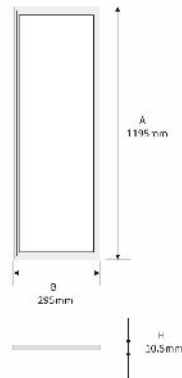

PRODUCT FEATURES

- ☒ Light output, up to 2,800Lm.
- ☒ Efficacy (up to 122Lm/W) delivering superior energy efficiency
- ☒ Ideal for residential, office and commercial applications
- ☒ Life time 50,000 hours (L70)
- ☒ Colour rendering exceeds CRI:80
- ☒ Beam Angle: 75°
- ☒ CCT options 4000K / 5000K
- ☒ Low glare (UGR<19)
- ☒ Sizes to fit all standard TBar ceilings
- ☒ Plasterboard mount frame accessory
- ☒ Dimming available on request
- ☒ Direct connection
- ☒ Five Year Warranty





Dimensions 1195x295x10.5mm

Model	Source	Lumen Output	System Power	CCT	Beam Angle
LPA-TPP14-264KW	LG5630G6	2800Lm	26W	4000K	75°
LPA-TPP14-266KW	LG5630G6	2800Lm	26W	6000K	75°
CRI	Driver	Material	Voltage	Colour	Dimming
>80	OSRAM	Aluminium	220-240VAC	wh	DALI dimmable option

Alternative colour temperatures available on request.

TALF PL-TPP14-26

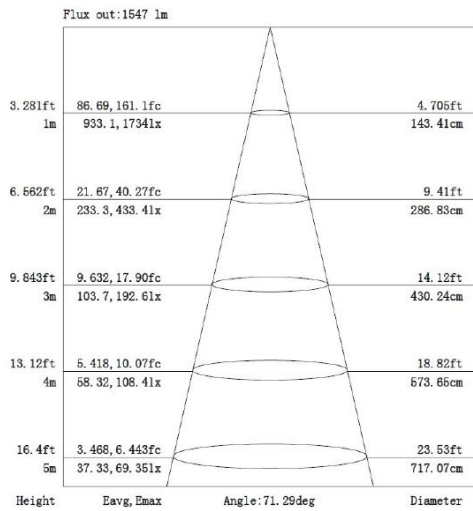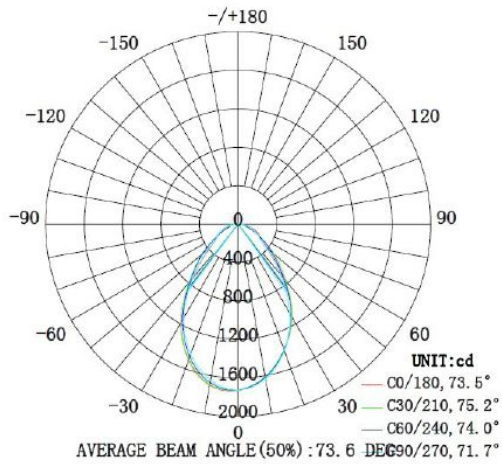

Alternative beam angles available on request.

Physical

Height:	10.5mm
Diameter:	295mm
Weight:	5.60Kg

Control and Programming

Dimming:	0-10V / DALI
----------	--------------

Construction

Fixture:	Aluminium
Fixture colour:	WH
Lens:	
Impact rating:	
Protection rating:	IP40

Connection

Power connection:	Flex and plug
-------------------	---------------

Output

Luminous Flux:	2,880Lm
Efficacy:	>107m/W
Beam Angle:	75°
CCT:	4000K
CRI:	>80
Quantity of Light source:	168
Lifetime:	50,000 hours at 70% lumen

Electrical

Input Voltage:	220-240VAC
LED Power:	22.62W
Driver Losses:	<13%
Total Power:	26W
Power Factor:	>0.9
Total Harmonic Distortion:	<10%

Thermal

Cooling:	
Operating Range Tc:	-10°C – 40°C
Humidity (non-condensing):	
Run Temperature Teq:	

Certificates

EMC:	CISPR 15:2011
Electrical Safety:	AS/NZS 60598.1:2013 AS/NZS 60598.2.1:2014