




VISI SR-EC11

Visi provides a low glare “semi trimless” look. Once recessed into the ceiling the Visi blends in effortlessly with its narrow trim and provides an anti-glare comfort light. However, trim size is no reflection on performance and Visi provides a full range of illumination level in both fixed and gimbal design.

Energy efficiency is key and Visi series are at the top of the performance scale, ensuring significant energy savings over alternative solutions. CCT colours, high performance miro reflectors, glass and honeycomb diffusers are optional on most products.

Phase dimmable with 0-10V and DALI available on request.

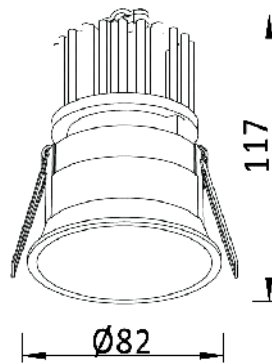

PRODUCT FEATURES



- ☒ Light output, up to 900Lm
- ☒ Efficacy (up to 100Lm/W) delivering superior energy efficiency
- ☒ Ideal for all commercial applications
- ☒ Life time 50,000 hours at 70% lumen maintenance
- ☒ Colour rendering exceeds CRI:90
- ☒ Beam Angle: 35°
- ☒ CCT options 3000K/4000K/5000K
- ☒ Low UGR<15
- ☒ Honeycomb louvre, miro reflector and glass optional
- ☒ Available colours black, white and silver
- ☒ Dimming options on request
- ☒ Flex and plug or direct connection
- ☒ Five Year Warranty



Cut out Ø75 Dimensions Ø82x117mm

Model	Source	Lumen Output	System Power	CCT	Beam Angle
LPA-SR-EC11-94K	CREE	500Lm	9W	4000K	35°
LPA-SR-EC11-164K	CREE	900Lm	16W	4000K	35°
CRI	Driver	Material	Voltage	Colour	Dimming
>90	TRIDONIC	Aluminium	110v-277v	BK / WH / SIL	TRIAC / 0-10V / DALI

Alternative colour temperatures available on request.

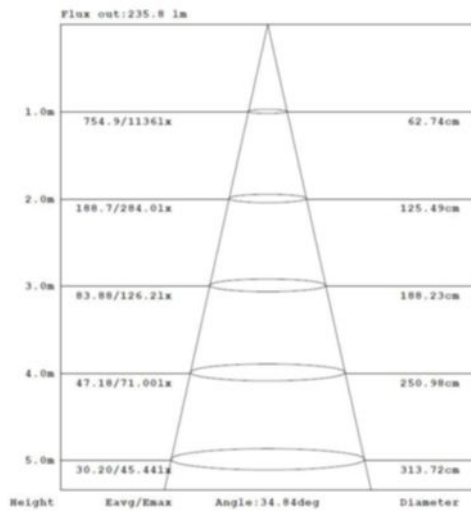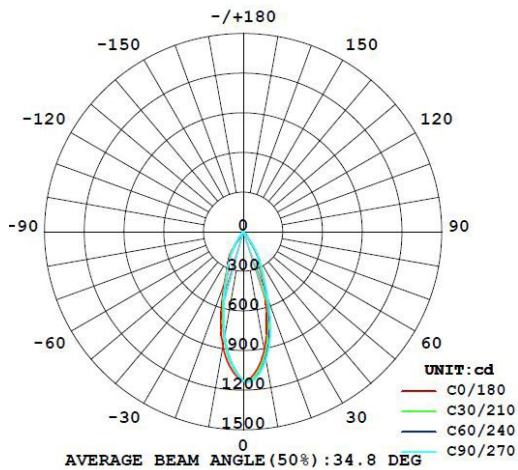

Enquire for availability of optional beam angles.

VISI SR-EC11

Physical

Height:	117mm
Diameter:	82mm
Weight:	0.35kg

Control and Programming

Dimming:	TRIAC / 0-10V / DALI
----------	----------------------

Construction

Fixture:	Aluminium
Fixture colour:	BK / WH / SIL
Lens:	35°
Impact rating:	IK07
Protection rating:	IP20

Connection

Power connection:	Flex and plug
-------------------	---------------

Output

Luminous Flux:	600Lm / 1000Lm
Efficacy:	85Lm/w / 62Lm/w
Beam Angle:	35°
CCT:	4000K
CRI:	>90
Quantity of Light source:	1
Lifetime:	50,000 hours at 70% lumen

Electrical

Input Voltage:	110v-277v
LED Power:	6W / 13W
Driver Losses:	1W / 3W
Total Power:	7W / 16W
Power Factor:	0.92
Total Harmonic Distortion:	≤15%

Thermal

Cooling:	Conduction
Operating Range Tc:	-20...+50
Humidity (non-condensing):	10-90%
Run Temperature Teq:	<70 °C

Certificates

EMC:	CISPR 15:2011 EN55015:2013 EN61547:2009 EN61000-3-2:2014 EN61000-3-3:2013
Electrical Safety:	AS/NZS 60598.1:2013 AS/NZS 60598.2.1:2014 EN60598-2-2:2012 EN60598-1:2015